

DS-KH8520-WTE1 Network Indoor Station



- 10.1-inch TFT touch screen with 1024 × 600 resolution
- Convenient Hik-Connect APP Mobile Control
- Receive calls, open the door and live view remotely
- Easy to use without PC
- Easy wizard for quick set up
- Configure the whole system on one touch screen
- Rich functions and extensions
- Live-view of the door station and cameras in public areas
- Support voice messages when no response from the indoor station
- Receive alarms by linkage with a alarm system and notify the center to handle in time
- Elevator access control

▪ Specification


System parameters	
Operation system	Embedded Linux operation system
Flash	32 MB
RAM	128 MB
CPU	Embedded processor
Display parameters	
Size	10.1-inch
Operation method	Capacitive touch screen
Type	Colorful TFT screen
Resolution	1024 × 600
Video parameters	
Video compression standard	/
Lens	Not supported.
FOV	/
WDR	/
Pixel	/
Focal length	/
Audio parameters	
Audio input	Built-in omnidirectional microphone
Audio compression standard	G.711 U
Audio output	Built-in loudspeaker
Audio compression bitrate	64 Kbps
Audio quality	Noise suppression and echo cancellation
Volume adjustment	Adjustable
Capacity	
Linked IPC	16
Linked indoor extensions	16
Notices	200
Linked doorphone	17
Network parameters	
Communication protocol	TCP/IP, SIP, RTSP
Wired network	10/100 Mbps self-adaptive
Wi-Fi	Wi-Fi 802.11 b/g/n
Bluetooth	/
3G/4G	/
Zigbee	/
Device interfaces	
Alarm input	8-ch alarm inputs
Network interface	1 RJ-45 10/100 Mbps self-adaptive
TAMPER	/
RS-485	1
USB	0
TF card	Max to 128 G, SD 2.0 or lower version

Alarm output	2
Power interface	1
General	
Button	0
Installation	Surface mounting
Indicator	0
Weight	1118 g (with packaging) 660 g (without packaging)
Protective level	/
Power supply method	IEEE802.3af, standard PoE 12 VDC/1 A
Working temperature	-10 °C to 55 °C (14 °F to 131 °F)
Working humidity	10% to 90%
Dimensions	254 mm × 166 mm × 22.55 mm (10.0" × 6.5" × 0.89")
Battery	/
Application environment	Indoor
Power consumption	≤ 6 W
Language	English, French, Portuguese (Brazil), Spanish, Russian, German, Italian, Polish, Arabic, Turkish, Vietnamese, Hungarian, Dutch, Romanian, Czech, Bulgarian, Ukrainian, Croatian, Serbian, Greek, Portuguese, Slovak

▪ Available Model

DS-KH8520-WTE1

▪ Dimension

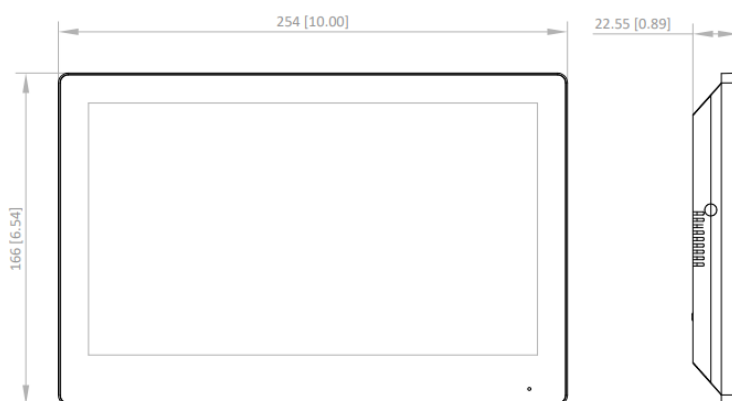

Unit: mm [inch]

SCALE 1:1

▪ **Accessory**

▪ **Optional**

DS-KD8003-IME1/FI				
DS-KAW50-1 50W 12V Power Adapter	ush KD8 Series Pro Modular Door Station	DS-KABH6320-T Indoor Station Table Bracket	DS-KAW50-1N 50W 12V Power Adapter	DS-KD9613-FE6 Facial Recognition Door station
				

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision_Global



Hikvision
Corporate Channel



hikvisionhq