


Art 100 Top

LL116002N

LOMBARDO



Technical information:

Installation:	Wall
Finish:	Black
Diffuser type:	Polycarbonate
Lamp type:	LED
Colour temperature:	4000K
CRI:	>80
LB Factor 50.000 h:	L80B20
Photobiological risk:	RG0
Power consumption (Watt):	10
Lumen:	1100
Real Lumen:	484
Power supply:	✓ integrated
LED:	220-240 V
Insulation class:	□ CL.II
Type of protection:	IP 66
Resistance to breakage:	IK 10 20J xx9
Standards and Marks of Conformity:	CE UK CA

Decorative cover moulded in polycarbonate, injection moulded in-house.



Art 100 Top

LL116002N

LOMBARDO



Lombardo S.r.l.

Via Pizzigoni 3, Villongo (BG) - 24060 - Italy - **T** 0039 035 939 411 - **F** 0039 035 939 496 - **E** info@lombardo.it

lombardo.it


Art 100 Top

LL116002N

LOMBARDO



Lighting simulation:

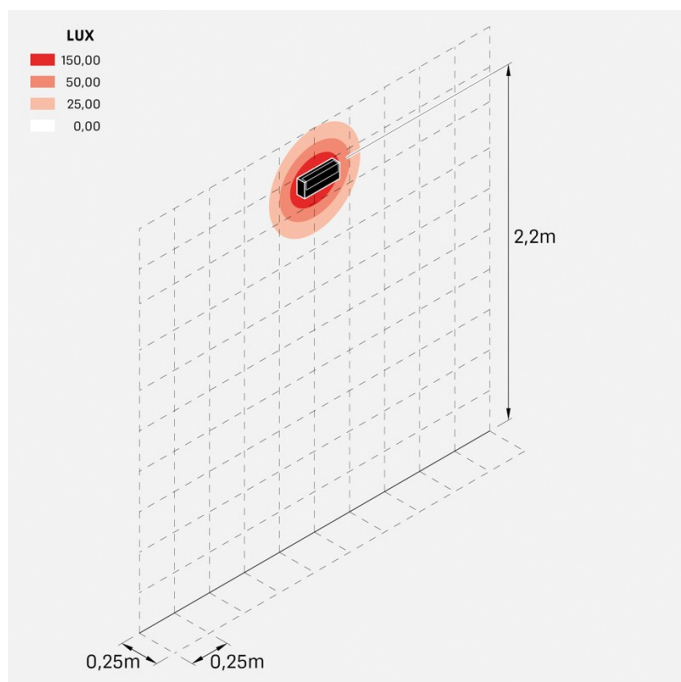

art_100_top