



CorePro LED PLC 2P



CorePro LED PLC 6.9W 840 2P G24d-2

CorePro, LED, PL-C, EM/Mains, G24D-2 ROT, 6.9 W, 18W PL-C, 4000 K, 770 lm, CRI 82, 30000 hour(s)

CorePro LED PLC 2P integrates a LED light source into a traditional fluorescent form factor. This product is the ideal solution for uplamping in general lighting applications: it meets basic lighting requirements, offers significant energy savings, and is environmentally friendly.

Product data


General Information		Photobiological safety according to EN 62471	
Cap-Base	G24d-2	RG1	
Nominal lifetime	30,000 hour(s)		
Switching Cycle	50,000		
Lighting Technology	LED		
Flux measurement reference	Sphere		
Warranty period	3 years		
Light Technical		Operating and Electrical	
Color Code	840 [CCT of 4000K]	Input Frequency	50 to 60 Hz
Beam Angle (Nom)	120 degree(s)	Power Consumption	6.9 W
Luminous Flux	770 lm	Lamp Current (Nom)	38 mA
Color Designation	Cool White (CW)	Starting Time (Nom)	0.5 s
Correlated Color Temperature (Nom)	4000 K	Warm-up time to 60% light	0.5 s
Luminous Efficacy (rated) (Nom)	111 lm/W	Power Factor (Fraction)	0.9
Color Consistency	<6	Voltage (Nom)	220-240 V
Color rendering index (CRI)	82	LED alternative to fluorescent lamp power	18W PL-C
LLMF At End Of Nominal Lifetime (Nom)	70 %	Inrush current at mains	2.78
		Max. lamp no. on MCB B type 10A - Mains	264
		Max. lamp no. on MCB B type 10A – EM ballast without Compensation Capacitor.	264
		Max. lamp no. on MCB B type 10A – EM ballast with Compensation Capacitor.	-
		Max. lamp no. on MCB B type 16A - Mains	422

CorePro LED PLC 2P

Max. lamp no. on MCB B type 16A – EM ballast without Compensation Capacitor.	422
Max. lamp no. on MCB B type 16A – EM ballast with Compensation Capacitor.	-
Ballast Compatibility	EM/Mains
Temperature	
T-Case Maximum (Nom)	75 °C
Controls and Dimming	
Dimmable	No
Mechanical and Housing	
Bulb Finish	Frosted
Bulb Material	Plastic
Product Length	125 mm
Bulb Shape	PL-C
Net Weight (Piece)	0.075 kg
Approval and Application	
Energy Efficiency Class	E
Energy Saving Product	Yes
Approval Marks	RoHS compliance CE marking KEMA Keur certificate

Energy Consumption kWh/1000 h	7 kWh
EPREL Registration Number	1820628
CE mark	Yes
EU RoHS compliant	Yes
Flickering value (PstLM) - Flickering value as per EN 61000-3-3	1
Stroboscopic effect visibility measure (SVM)	0.4
Ambient temperature range	-20 to +35 °C
Product Data	
Order product name	CorePro LED PLC 6.9W 840 2P G24d-2
Full product name	CorePro LED PLC 6.9W 840 2P G24d-2
Full product code	872016928756300
Order code	929003757302
Material Nr. (12NC)	929003757302
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8720169287563
Numerator - Packs per outer box	10
EAN/UPC - Case	8720169287570



Dimensional drawing

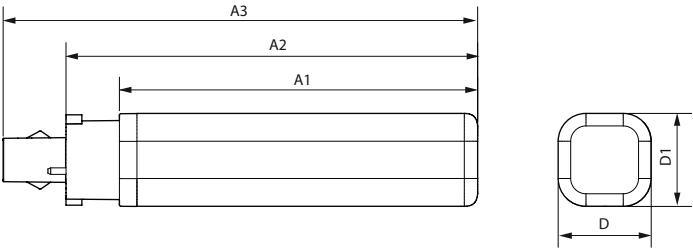

Product	D1	D	A1	A2	A3
CorePro LED PLC 6.9W 840 2P G24d-2	34 mm	34 mm	106 mm	125 mm	148 mm


CorePro LED PLC 2P

Photometric data

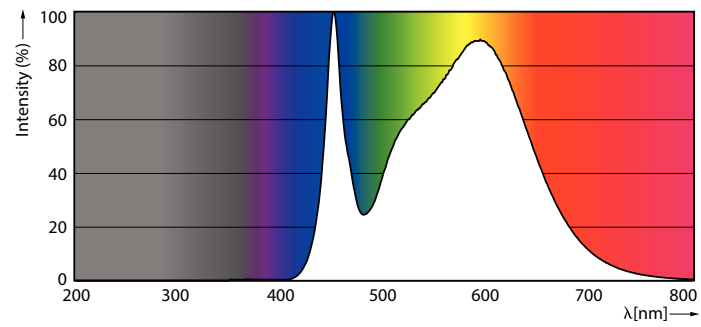


General uniform lighting - CorePro LED PLC 6.9W 840 2P G24d-2

Spectral Power Distribution Colour - CorePro LED PLC 6.9W 840 2P G24d-2




Light Distribution Diagram - CorePro LED PLC 6.9W 840 2P G24d-2

Lifetime

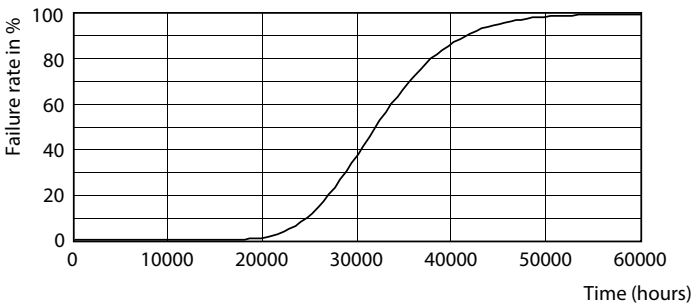



Life Expectancy Diagram

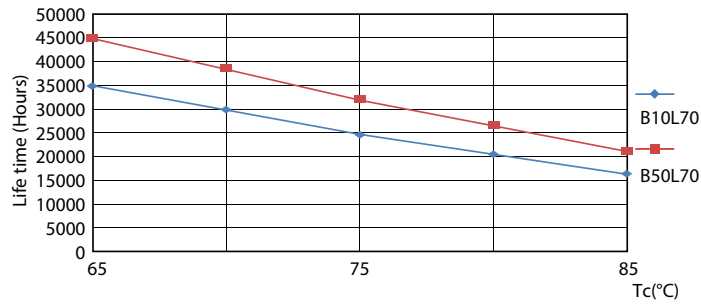

LifetimeVsTc

CorePro LED PLC 2P

Lifetime

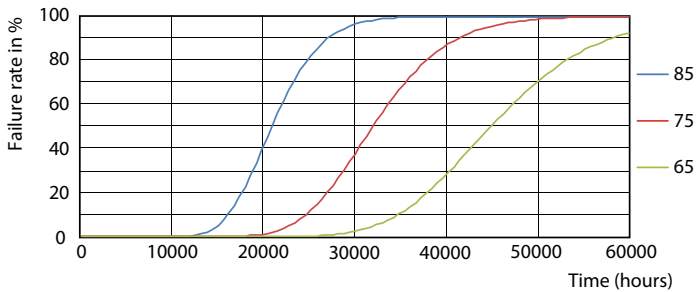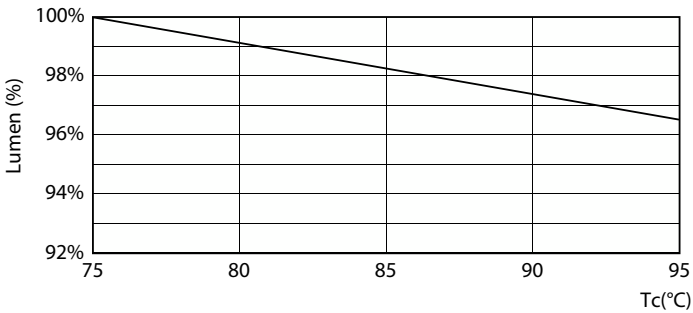

Lumen Maintenance Diagram - CorePro LED PLC 6.9W 840 2P G24d-2

FailureRate



Lumen Maintenance Diagram - CorePro LED PLC 6.9W 840 2P G24d-2

