


DecoSystems
LED spots/pendants

Create your own combination
Basic spot or pendant and shade!



Basic-Spot A++-E
incl. 1x3,5 W, GZ10
250 lm, 2.700 K
230 V
⌀125 ø51 ⌀50 mm
CM 951.82
W 951.86

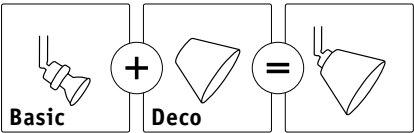

Basic-Pendulum A++-E
incl. 1x3,5 W, GZ10
250 lm, 2.700 K
230 V
⌀135 cm
CM 951.83
W 951.85



Wolbi
max. 50 W
⌀80 ø90 mm
600.11
 Dichroic Glass



Vento
max. 50 W
⌀95 ø80 mm
953.59
 Smoke glass Glass



Twice
max. 50 W
⌀70 ø100 mm
701.74
 Clear/Opaque Glass



Vento
max. 50 W
⌀95 ø80 mm
953.58
 Satin Glass



Wolbi
max. 50 W
⌀70 ø90 mm
600.55
 Opal Glass



Quad
max. 50 W
⌀80 ø75 mm
600.15
 White Glass



Kegi
max. 50 W
⌀80 ø110 mm
600.12
 White Glass



Wolbi
max. 50 W
⌀80 ø90 mm
600.07
 White Glass



Turno
max. 50 W
⌀90 ø80 mm
953.56
 Satin Glass




Zyli
max. 50 W
⌀80 ø70 mm
600.04
 White Glass



Rado
max. 50 W
⌀95 ø70 mm
953.55
 Clear Glass



Tessa
max. 50 W
⌀152 ø255 mm
603.24
 Blue Fabric



Tessa
max. 50 W
⌀152 ø255 mm
603.25
 Yellow Fabric



Tessa
max. 50 W
⌀152 ø255 mm
603.26
 White Fabric



Tessa
max. 50 W
⌀152 ø255 mm
603.27
 Apricot Fabric



Tessa
max. 50 W
⌀152 ø255 mm
603.52
 Light grey Fabric



Tessa
max. 50 W
⌀152 ø255 mm
603.51
 Cream Fabric



Tessa
max. 50 W
⌀152 ø255 mm
603.50
 Caramel Fabric



Tessa
max. 50 W
⌀152 ø255 mm
603.49
 Dark brown Fabric



DecoSystems Diffusor
max. 20 W
⌀1,5 ø255 mm
954.93
 Satin Plastic




Pendant accessories



Pendant adapter, can be shortened
⌀135 ø26 mm
CM 974.74




Universal Pendant Adapter
230 V
⌀106 ø62 mm
CM 954.94
W 954.95



The URail pendant can be shortened without the use of tools

max. ⌀1 m ø6 mm



Simply connect pendants without a URail connector to the rail.

max. 3 kg

Starter sets

Matches all pendants and spots



URail Basicsystem A++-E
max. 1.000 W
230 V
⌀3,1 m
CM 950.16